


O₃ Mini OTDR

5 in 1---OTDR/OLS/OPM/VFL/LED Light



Map View

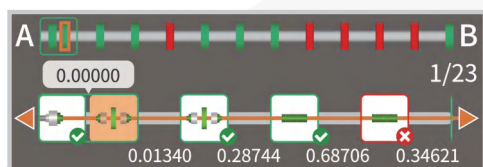

Power button

Type-C

Charging indicator



Main menu button



VFL button

LED button

PARAMETERS

Wavelength	1310nm/1550nm
Dynamic range	22/20dB
Distance setting	Max. 80km
Connector	SC/UPC or SC/APC
Pulse width	5ns~20μs
Event dead zone	3m
Attenuation dead zone	12m
OLS function	Same wavelength and connector as OTDR
OPM function	+26~-50dBm, 850/970/980/1270/1300/1310/1490/1550/1577/1625/1650nm, 2.5mm UPP
VFL function	10mW, 2.5mm universal connector
Storage	Internal memory or U-disk(optional)
Power supply	3.7V, 2000mAh
Power & data port	Type-C
Operation temperature	0~+50°C,<90% RH
Storage temperature	-20~+70°C,<90% RH
Size	120mmX76mmX38mm
Weight	About 210g

ACCESSORIES



Host



Carrying bag



Calibration certificate